



Rec'd PCT/PTO 28 APR 2003
PCT/GB 2003 / U U 4 0 3 4



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport

South Wales
NP10 8QQ

REC'D 16 DEC 2003

WIPO

PCT

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the application is now proceeding in the name as identified herein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

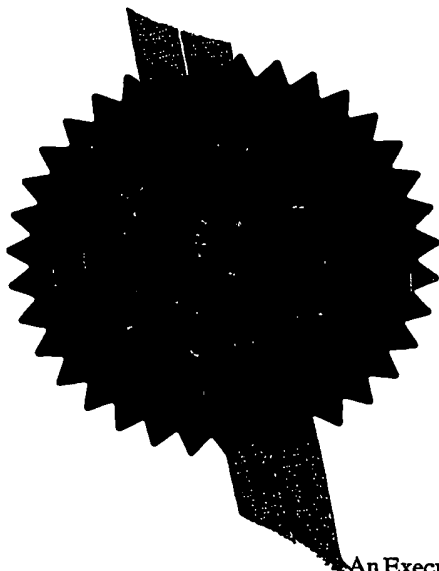

Signed

Le Behan

Dated

18 November 2003

BEST AVAILABLE COPY



INVESTOR IN PEOPLE

GB 0225013.2

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

SPLASHPower LIMITED,
Incorporated in the United Kingdom,
St John's Innovation Centre,
Cowley Road,
CAMBRIDGE,
CB4 0WS,
United Kingdom


[ADP No. 08522310001]

28. OCT. 2002 18:37

HARRISON GODDARD FOOT

NO. 320 P. 3

Patents Form 1/77

Patents Act 1977
(Rule 16)The
Patent
Office28OCT02 0759059-1 002973
001/7700 0.00-0225013.2

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

CTV/P101282GB

2. Patent application number
(The Patent Office will fill in this part)

0225013.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Zap Wireless Technologies Limited
Downing Park Innovation Centre
Swaffham Bulbeck
Cambridge
CB5 0NB

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UK

4. Title of the invention

Improvements relating to contact-less power transfer

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Belgrave Hall
Belgrave Street
Leeds
LS2 8DD

Patents ADP number (if you know it)

14574081

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

UK

0210886.8

13/5/2002

UK

0213024.3

7/6/2002

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if

- a) any applicant named in part 5 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

0051096 28-Oct-02 05:45

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form:
Do not count copies of the same document

Continuation sheets of this form	0
Description	14
Claim(s)	0
Abstract	0
Drawing(s)	14

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

1

Cover letter

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

28/10/2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Chris Vaughan

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered "Yes" Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

IMPROVEMENTS RELATING TO CONTACT-LESS POWER TRANSFER

This invention relates to a new device and method for transferring power in a contact-less fashion.

5

Today's inductively-chargeable portable devices, for example the Braun Oral B Plak Control power toothbrush, must typically be precisely aligned with their charger in order to charge them. This precision is necessary so that the coil in the device is correctly aligned with the coil in the charger — the coils being, in effect, the two halves of a conventional power transformer.

10

Some examples of typical prior art are shown in Figure 1. In Figure 1a, the primary coil of the charger is aligned with the secondary coil of the device. In Figure 1b, a horseshoe electromagnet on the charger is aligned with a similar electromagnet on the device. Figure 1c operates in a very similar way to Figure 1b: the field is created by two coils operating in antiphase (with the lower return circuit being an air gap), and the secondary coil is a flat wound coil. Prior art such as US4873677 works in such a fashion. Note in all cases the precise alignment that is required in order to achieve good coupling between the primary and secondary coils.

20

Referring now to Figure 2 which explains some terminology used in the present application: Figure 2a shows some charger 201 with a surface 203, the charger 201 emitting a field, and some device 202 charging from the charger 201 (and appreciating that in this figure the shapes of both are irrelevant). Figure 2b shows that the device 202 may move about on ("be translated relative to") the surface 203 of the charger 201 in two directions, depicted X and Y, which are at right angles to one another. The device 202 may also move nearer to and further from the charger 201 in direction Z, but as this will eventually take it out of the charging field, and this is therefore not considered here.

30

Figure 2c shows that in addition to the above translations, the device 202 may rotate around the X axis (rX), the Y axis (rY) and the Z axis (rZ). In the present application,

only rotations about rZ , and not those around rX or rY , shall be considered. Each of these six translations and rotations is independent from (also known as "orthogonal to") the others, and is known as a "degree of freedom".

- 5 Figure 2d shows an alternative translation co-ordinate system. Instead of orthogonal (X,Y) movement, the position of the device 202 is determined by the radius (r) and the angle (θ) from some centre point. Even though θ involves rotation, it is still a translational degree of freedom, since the device 202 itself need not rotate about its own axis.

10

For maximum user convenience a system should allow up to five degrees of freedom - translation in the Z axis not being of practical use - so that a device 202 can be placed without regard to its position or orientation on the charger 201.

- 15 But today's toothbrush chargers and the like are typically much more constrained. Systems employing the transformer configuration shown in Figure 1a offer one degree of freedom (rotation in the plane of the coils), and those shown in Figure 1b and Figure 1c offer zero degrees of freedom, since if the device is to continue to receive adequate power it cannot be either rotated nor translated relative to the
20 charger. Having zero - or only a few - degrees of freedom requires precise alignment which may be inconvenient to the user because it requires a degree of care and manual dexterity in placing the device 202 on the charger 201.

- In addition, systems lacking the translational (X and Y) degrees of freedom cannot
25 charge multiple devices simultaneously, because of course not more than one device can occupy the required (X,Y) position at once.

- In addition, such systems requiring precise primary:secondary alignment are also not a universal inductive charging solution - one able to charge devices with very
30 different power requirements - because the different coil sizes mandated by the power needs of different types of devices will not be a good match for any single size of charger coil - see Figure 3.

Various means of increasing the number of degrees of freedom have been proposed.

One simple method is to have a large coil in the charger, emitting a large field,
5 allowing the device to pick-up sufficient power even if it is not perfectly aligned.
Figure 4, for example, shows such a charger coil 401 and device coil 402. This is the
method adopted by various RFID devices. However the coupling between the coils
401 and 402 will be poor and highly variable dependent on position, so this solution
is inefficient and limits the power that can be transferred while still complying with
10 emission legislation. Therefore this solution is far from ideal in charging
applications, where efficiency is typically an important criterion.

A solution which improves upon the efficiency of such "large coil" systems, while
still offering several degrees of freedom, is to use multiple coils in the charger,
15 enabled as appropriate, ensuring that there is always a reasonable match between
nearby charger coils and the device coil. See Figure 5, showing multiple charger
coils 501 and single device coil 502. Prior art includes:

- A system is described in the Journal of the Magnetics Society of Japan titled
"Coil Shape in a Desk-type Contactless Power Station System" (29th Nov
20 2001)

An alternative solution is the present applicant's UK patent application number
0210886.8 of 13 May 2002, which discloses a system generating a horizontal field
across the surface of the charger, in contrast to conventional solutions which generate
25 a vertical field out of the surface of the charger. This offers the same two
translational degrees of freedom (X and Y) as the above multiple-coil approach, but
with better field uniformity and therefore worst-case efficiency. Optionally, the
horizontal field may be rotated in the plane of the charger, offering an additional one
degree of rotational freedom (α). See Figure 6 which shows a laminar charger 601
30 generating a magnetic field in the plane of the charger 602 and a device 610 capable
of receiving power from such a field when it is in a certain alignment 611. If the field

generated by the charger is made to rotate, as shown, then there is no requirement to align the device in any particular orientation.

5 According to a first aspect of the present invention, there is provided a unit for transferring power in an inductive manner to at least one power-receiving device, the unit being provided with at least one electrical coil, and the power-receiving device being capable of receiving power when placed in more than one position or rotation on the unit.

10 The unit may include a pad in which the coils are disposed, the pad serving as a surface upon which power-receiving devices may be placed in order to effect power transfer. The unit may incorporate a power supply or be connectable to a power supply. This may apply also to the further aspects of the invention set out hereinbelow.

15

According to a second aspect of the present invention, there is provided a unit for transferring power in an inductive manner to at least one power-receiving device, the unit being provided with a plurality of electrical coils, the electrical coils not all being of the same shape.

20

The coils may be simple conductive loops, or may comprise a more complex arrangement of conductors. Where a more complex arrangement of conductors is provided, for example as disclosed in the present applicant's co-pending UK patent applications numbers 0210886.8 of 13th May 2002 and 0213024.3 of 7th June 2002

25 (the full disclosures of which are hereby incorporated into the present application by reference), the term "coil" in the context of the present application is intended to denote each separate arrangement of conductors that defines a given charging region or active area on the primary unit and on which a secondary device is placed in order to effect charging.

30

The plurality of electrical coils preferably in this aspect may also not all be of the same size and/or not all enclose the same dimensional area.

According to a third aspect of the present invention, there is provided a unit for transferring power in an inductive manner to at least one power-receiving device, the unit being provided with a plurality of electrical coils, the electrical coils not all
5 being of the same size and/or not all enclosing the same dimensional area.

In some embodiments, all the coils may be of mutually different shapes and/or sizes and/or dimensional areas. In other embodiments, two or more of the plurality of coils may have the same shape and/or size and/or dimensional area, with the
10 remaining coils having one or more different shapes and/or sizes and/or dimensional areas, or all having the same different shape and/or size and/or dimensional area.

The coils may be spatially separated from each other such that no coil is enclosed in or overlaps with any other coil. Alternatively, one or more smaller coils may be
15 contained within a boundary of one or more larger coils. Where one or more smaller coils are contained within a boundary of a larger coil, the coils may be substantially concentric, or may have some other arrangement. For example, a plurality of smaller coils may be contained within a boundary of a larger coil in such a way that the smaller coils are not contained within each other or overlap with each other. Some
20 smaller coils may be nested within each other within the boundary of a larger coil, with some other smaller coils not being nested within each other within the same outer boundary.

The coils may take various shapes, including circular, elliptical, generally ovate,
25 triangular, rectangular, parallelogram, trapezoidal, star-shaped, regular polygonal, irregular polygonal or amorphous.

According to a fourth aspect of the present invention, there is provided a unit for transferring power in an inductive manner to at least one power-receiving device, the
30 unit being provided with at least one plurality of nested electrical coils and also with means for selectively activating one or more of the nested electrical coils so as to be

adaptable to provide efficient power transfer to power-receiving devices of different sizes and/or power requirements and/or positions/rotations.

5 The means for selectively activating one or more of the nested coils may be adapted automatically to sense an appropriate size and/or power requirement and/or position/rotation determinant of the power-receiving unit (for example, a size or sizes of secondary power-receiving coils in the power-receiving device).

10 The nested coils may be substantially circular, or may take any other appropriate shape as outlined above.

15 In a particularly preferred embodiment, there are provided four nested sets of electrical coils, each having a substantially right-angled triangular shape, and arranged such that the right-angles of the four sets of coils all point towards a single origin point such that the four sets of nested coils have an overall substantially square or rectangular configuration. Preferably, adjacent sets of coils are driven in antiphase so as to cause rotation of a resultant electromagnetic field about the origin point, thereby providing a degree of rotational freedom in the positioning of a power-receiving device on the pad.

20 According to a fifth aspect of the present invention, there is provided a unit for transferring power in an inductive manner to at least one power-receiving device, the unit being provided with an even number of electrical coils each having corner portion, the coils being arranged such that the corner portions all point towards an origin point, and wherein, in operation, adjacent coils are driven in antiphase so as to cause rotation of a resulting electromagnetic field about the origin point.

30 There is preferably provided four coils, which may each have a substantially right-angled triangle shape, a quarter circular shape or any other appropriate shape. Where more than four coils are provided, they may each have a generally triangular shape or take the shape of a sector of a circle.

Any of the first to fourth aspects of the present invention may be combined with at least one power-receiving unit so as to form a system for contact-less power transfer.

5 According to a sixth aspect of the present invention, there is provided a system for contact-less power transfer, the system comprising a power-transmitting unit provided with a primary coil and at least one power-receiving device incorporating a secondary coil, wherein the primary coil is generally elongate along an x-axis with respect to an orthogonal y-axis, and wherein the secondary coil is sized so as to be sufficiently similar in size to the primary coil with respect to the y-axis so as to provide efficient power transfer, but smaller in size with respect to the x-axis so as to provide a translational degree of freedom of movement along the x-axis.

10 In this way, several power-receiving devices may be simultaneously provided with power by the primary coil by placing the devices adjacent each other along the x-axis.

15 The primary coil may be generally rectangular, or any other appropriate shape, including elliptical or generally ovate. The secondary coil preferably has a corresponding rectangular (possibly square) or elliptical or ovate or other configuration, subject to the constraints that the extent of the primary coil along the y-axis is substantially similar to that of the secondary coil along the y-axis, and that the extent of the primary coil along the x-axis is greater than that of the secondary coil along the x-axis. Preferably, the extent of the primary coil along the x-axis is at least twice, advantageously at least three or four times, that of the secondary coil along the x-axis.

20 According to a seventh aspect of the present invention, there is provided a system for contact-less power transfer, the system comprising a power-transmitting unit provided with at least one primary coil and at least one power-receiving device incorporating a secondary coil, wherein power transfer takes place by way of coupling of near-field flux flowing about the boundary of the at least one primary coil with windings of the secondary coil.

There may be provided just a single primary coil of appropriate configuration, or a plurality of adjacent primary coils which will enable a plurality of power-receiving devices to receive power simultaneously.

5

The at least one primary coil may be generally rectangular in shape, in which case there is one linear degree of freedom of movement of the secondary coil.

Alternatively, the at least one primary coil may be substantially circular or elliptical or the like, in which case a rotational degree of freedom of movement is provided.

10

According to a eighth aspect of the present invention, there is provided a system for contact-less power transfer, the system comprising a power-transmitting unit provided with first and second substantially concentric primary coils, the first being larger than the second, and at least one power-receiving device incorporating at least one secondary coil dimensioned so as to correspond to a distance between the first and second primary coils, wherein power transfer takes place by way of coupling of near-field flux flowing about the boundaries of the first and second primary coils with generally opposed edges of the secondary coil.

15

The first and second primary coils in this aspect are supplied with currents flowing in opposite directions. The coils may be generally circular, or may take any other appropriate shape as hereinbefore described.

20 Summarising the above, the table below lists the desirable characteristics of any inductive charging system, and illustrates how those of the present invention compare with prior art:

	Today's chargers	Present invention	UK 0210886.8
Simple (therefore cheap to make)	Y	Y	Y
Efficient and uniform field	Y	Y	Y

<i>(high-power within regulations)</i>			
Simultaneous <i>(more than one device at a time)</i>	N	Y	Y
Universal <i>(many types of devices)</i>	N	Y	Y
Degrees of freedom <i>(convenience)</i>	0 or 1 (rZ)	0..2 of (X,Y,rZ)	2 (X,Y) 3 (X,Y, rZ)

Embodiments of the present invention may therefore provide greater simplicity (and thus reduced cost) by offering a number of degrees of freedom which is less than that of GB 0210886.8, but greater than that of today's "toothbrush" chargers, while still
5 preserving many of the benefits of GB 0210886.8 (Simplicity, Efficiency, Simultaneity and Universality).

Additionally, this may optionally be achieved while still retaining forward compatibility with devices and chargers of the type described in GB 0210886.8.

There shall now be described various embodiments of the present invention that fit into the following three categories:

1. No degrees of freedom – the charger has different positions for different types of device (Figure 7)
- 15 2. Only the rZ rotational degree of freedom, so the device has to be placed in the correct position on the charger. The charger has a single location with an effective coil size that alters with device needs (Figure 8 and Figure 9)
3. Only one translational degree of freedom (Figure 10), either:
 - a. Linear translational
 - 20 b. Circular translational, and rotational

Addressing each of these categories in turn:

1. No degrees of freedom

Figures 7a,7b,7c show three different types of charger configuration 701 which each have several sizes or shapes of coil 702,703,704. Each coil could be, for example, a multiply-wound coil of a type similar to that in Figure 1a. The coils may all be driven simultaneously, or only when a device is sensed.

5

The location and/or rotation and/or type of each coil is made clear by some indicator, allowing the user to place their device onto the coil which best couples to it, and in the correct orientation if such is necessary.

- 10 In Figure 7a, the coils are spatially separate (allowing multiple devices to be charged simultaneously), in Figure 7b they are concentric, and in Figure 7c they are a mixture of the two.

The coils can of course be of any shape to suit the device, and some examples are
15 shown in Figure 7d.

2. Only the one rZ rotational degree of freedom

Figures 1a and 8a show a prior art system with a single rotational degree of freedom – a coil on the primary 800 couples to a corresponding coil on the device 801 in the
20 manner of a simple transformer.

Figure 8b shows an alternative method of achieving the same rotational degree of freedom for a device 811 which expects a field in the manner of Figure 1c. An antiphase field is driven into sets of coils 810A and 810B such that the field rotates
25 from being aligned in the 810A axis to being aligned in the 810B axis and back to 810A. Thus over time the device receives a significant amount of power no matter what its orientation.

Figure 9 extends these two means of generating a rotational degree of freedom by
30 adding universality. A charger 901 consists of a number of such coils, arranged concentrically, each of which can be driven independently. The charger behaves differently depending on which type of device is present 902.

- In Figure 9a no device is present, and so no charger coils are driven.
- In Figure 9b a physically small device with correspondingly small power requirements is present, and so only a few of the inner coils are driven.
- In Figure 9c a physically large device with correspondingly large power requirements is present, and so many of the coils are driven.

5

Figures 9d,9e,9f show a charger with a coil configuration 903 of the type shown in Figure 8b, but again arranged concentrically as above, with similar benefits.

10 3a. One linear translational degree of freedom

Figure 10 shows various configurations in which the primary charger coil is larger than the secondary device coil, but constrained in its dimensions such that it offers a reasonably efficiency with a single translational degree of freedom in the X axis, and therefore the option of simultaneous charging of multiple devices.

15

In Figure 10a a rectangular charger coil 1001 drives a smaller device coil 1002 by generating a field in the Z axis. By being similar in size to the device coil in the Y dimension, reasonable efficiency is obtained. By being significantly larger than the device coil in the X dimension, one degree of translational freedom is achieved.

20

Of course the coils could be any type of shape (for example ellipsoidal) rather than rectangular as shown – an important point is the aspect ratio.

Figures 10b and 10c achieve a similar result for devices of the Figure 1c type, 1003.

- 25 In Figure 10b, a charger coil identical to Figure 10a is used. In Figure 10a it was be considered to be generating a net flux out from the centre of the coil in the Z dimension, but it can equally be viewed "up close" to the edge of the coil as generating a flux which is rotating around the wire(s), as shown in Figure 10b. Therefore if a device of Figure 1c is placed across any edge of the coil, it will receive
- 30 the flux.

5 In Figure 10c a second coil is placed below the first 1004. If placed along the boundary between the two, as shown, the device coil will receive power from each coil. Of course this concept can be extended indefinitely in the Y dimension, as shown with a dotted line, to produce any number of lines along which a device may receive power.

3b. One circular translational degree of freedom

10 Figure 11a shows a large coil 1101 with a small coil 1102 inside it. The coils carry current in opposite directions, and so will generate a net flux flowing in the Z axis (out of the page). If a device with a coil 1103 is placed anywhere within the annulus formed between the coils, it will receive this flux with reasonable efficiency. Thus the device has a circular translational degree of freedom, and multiple devices can be placed on the charger.

15 Figure 11b shows a similar scheme working with a device of Figure 1c type. The device straddles the outer coil 1101 to couple with it. This could be seen as a variant of Figure 10b.

It will be appreciated that the coils do not have to be circular.

20

In each of the above cases, the charger may sense if any device is present on any particular coil, and if so what its power needs are. Possible means for doing this include but are not limited to:

- Sensing the resonance ("Q") or other characteristics of the driven coils
- 25 • Communication by modulation of data signals onto the magnetic field (e.g. "back-scatter", as used by RFID devices).

30 In all embodiments of this present application, the user has limited degrees of freedom when placing devices. Therefore it may be advantageous to indicate these constraints to the user.

Such indications may be done in a variety of ways, for example:

- For chargers with placement restrictions, indicating the correct device position by means of:
 - o Outlining of the coil area
 - o Filling, or patterning, the active coil area.
- 5 • For chargers with rotational restrictions, indicating the correct device rotation by means of:
 - o A line or arrow, or set of such.

The indications may be rendered in any number of media, for example:

- 10 • Printing ink, perhaps of a particular colour
- Raising or lowering the charger surface.
- Overall shape of the charger, or part of it.

The device may include corresponding indications.

15

Some examples of possible indications are shown in Figure 12, which:

- Figure 12a shows a printed or raised outline of two devices, for chargers which have no degrees of freedom.
- Figure 12b shows a printed or raised arrow on both the charger and the
- 20 device, for chargers with 2 translational but not rotational degrees of freedom.
- Figure 12c shows similar to 12b, but with striped indication instead of arrows.
- Figure 12d shows a "target" of concentric circles on both charger and device, for chargers with only a rotational degree of freedom.
- 25 • Figure 12e shows a charger with one circular translational degree of freedom, designed such that the active area of the charger is obvious from its form.

Prior art such as US5952814 [Philips phone charger with interlock] describes how the casing of charger may be made to match the internal shape of the charger thus

30 allowing for accurate alignment of the primary and secondary coils.

It will be appreciated that in the case of a device coil designed to receive power by picking-up flux travelling substantially in the plane of the charger, as opposed to orthogonal to it, numerous possible designs of core are possible, for example but not limited to:

- 5 • a rod of permeable material with wire coiled around it (Figure 13a) or
- a flat piece of permeable material with a wire coiled flat around it (Figure 13b), as in Figure 1c.

10 It will also be appreciated that in any of the above, the precise shape of any coils in the device and/or charger will have an effect on the efficiency and other characteristics. For example, replacing any square coil with a circular coil may reduce efficiency somewhat, but, thanks to the rotational symmetry of a circle, allows the device to have a rotational degree of freedom.

15 The preferred features of the invention are applicable to all aspects of the invention and may be used in any possible combination.

20 Throughout the description and claims of this specification, the words "comprise" and "contain" and variations of the words, for example "comprising" and "comprises", mean "including but not limited to", and are not intended to (and do not) exclude other components, integers, moieties, additives or steps.

P101282gb.spc

25

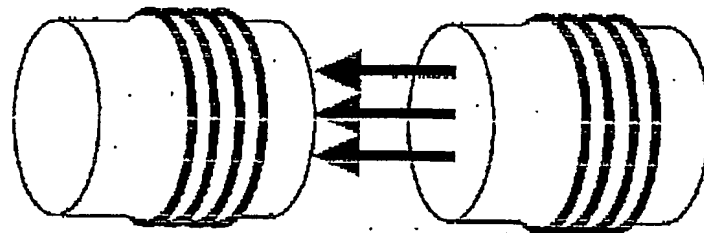


Figure 1a
(Prior Art)

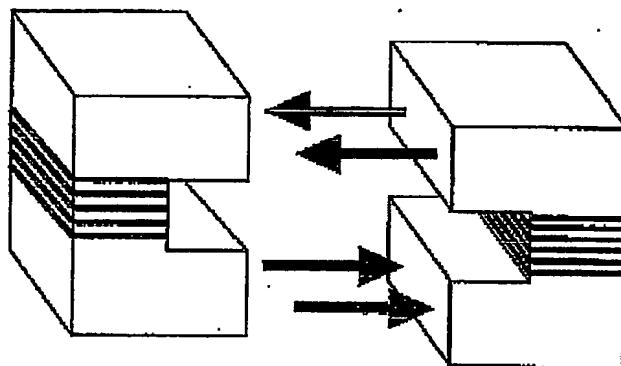


Figure 1b
(Prior Art)



Figure 1c
(Prior Art)

1/14

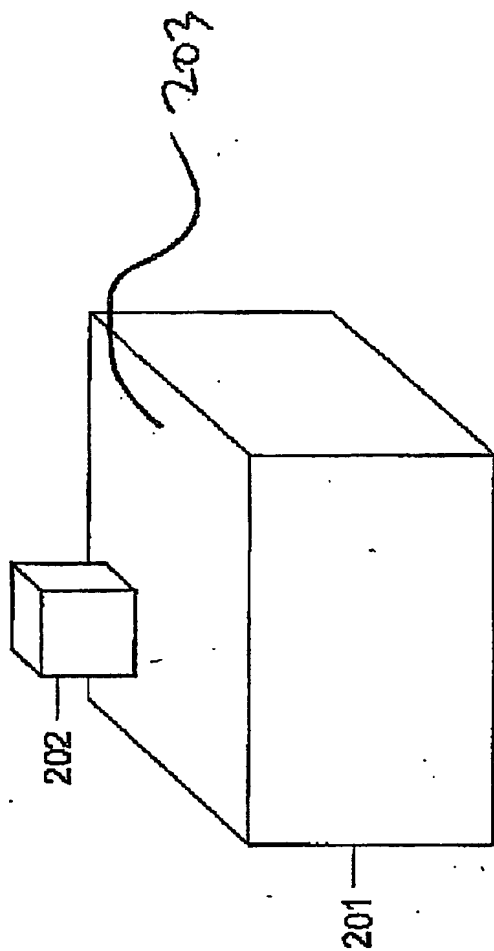


Figure 2a

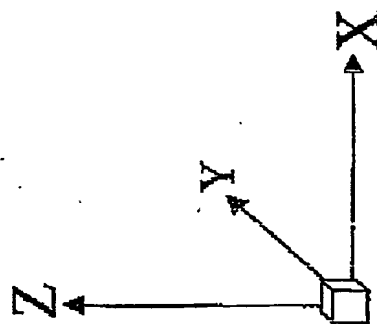


Figure 2b

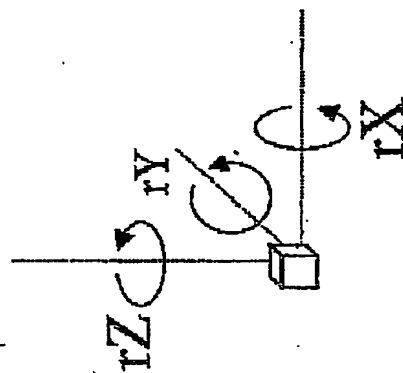


Figure 2c

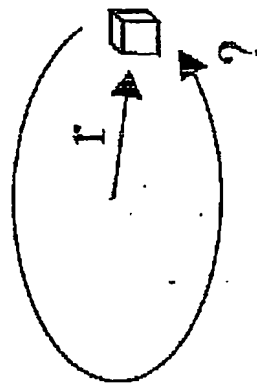


Figure 2d

2/14

3/14

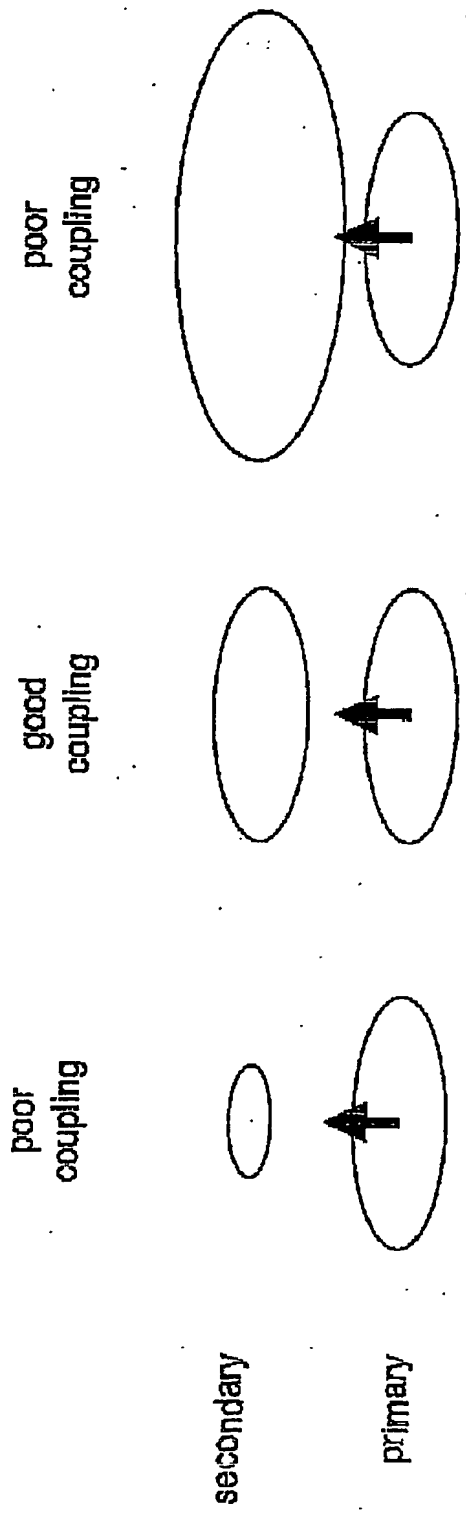


Figure 3

4 (14)

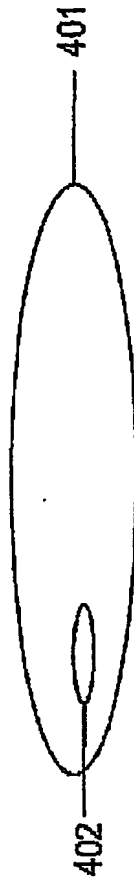


Figure 4
(Prior Art)

5/14

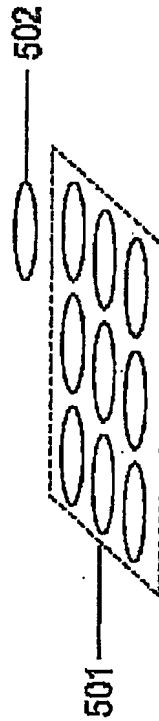


Figure 5
(Prior Art)

6(14)

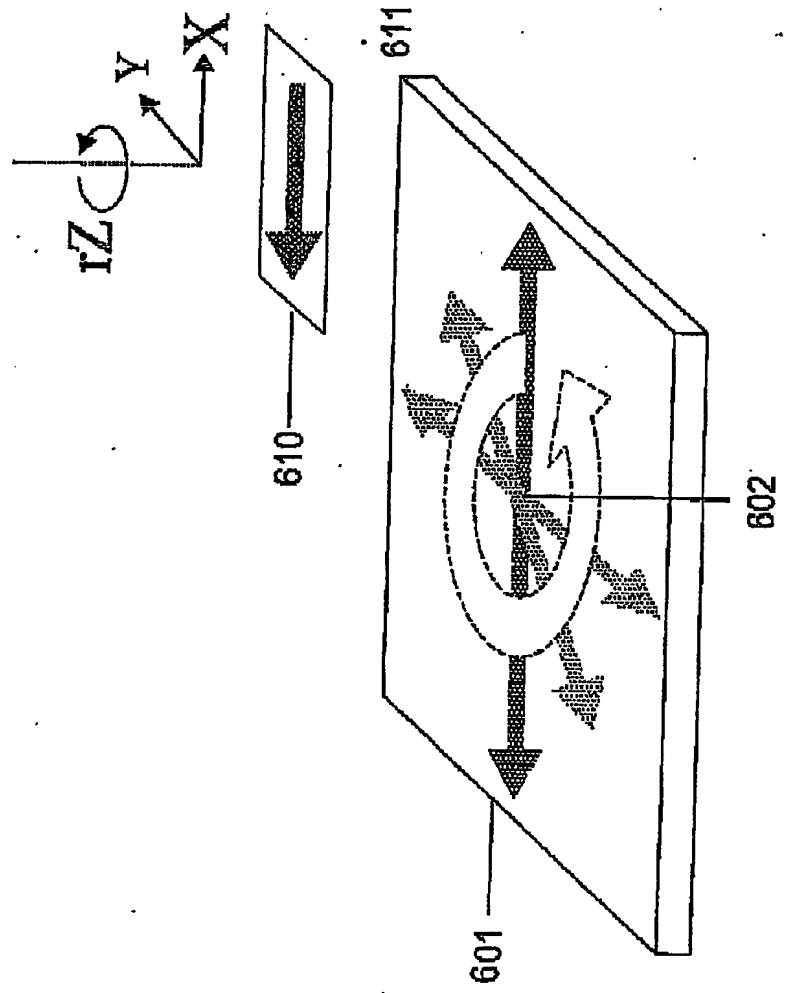


Figure 6
(Prior Art)

7(14)

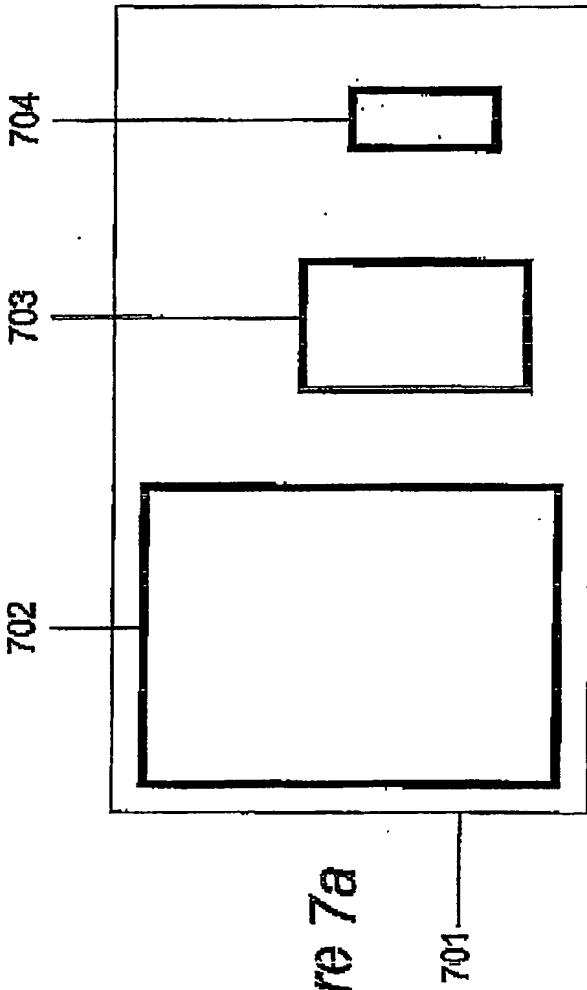


Figure 7a

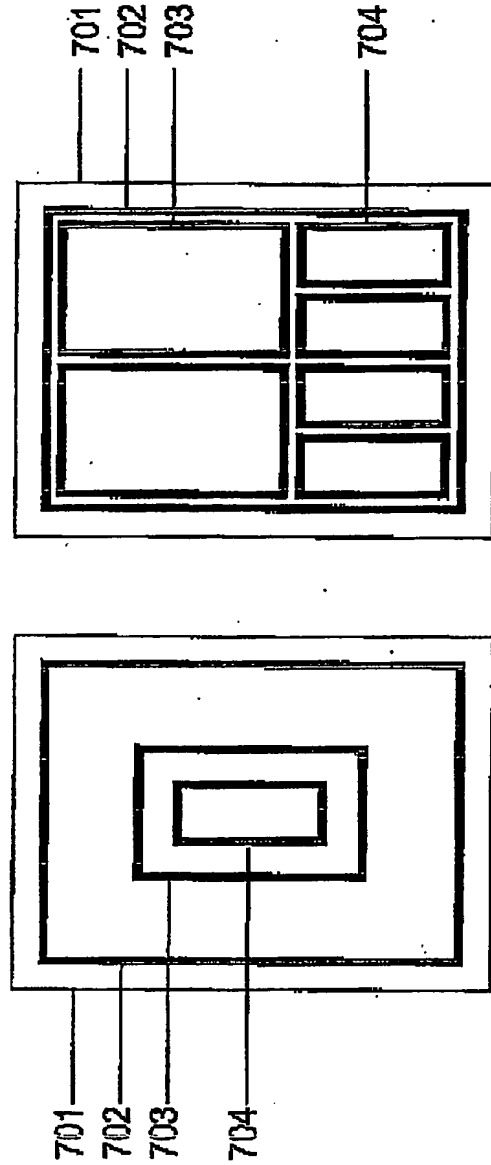


Figure 7c

Figure 7b

8/14

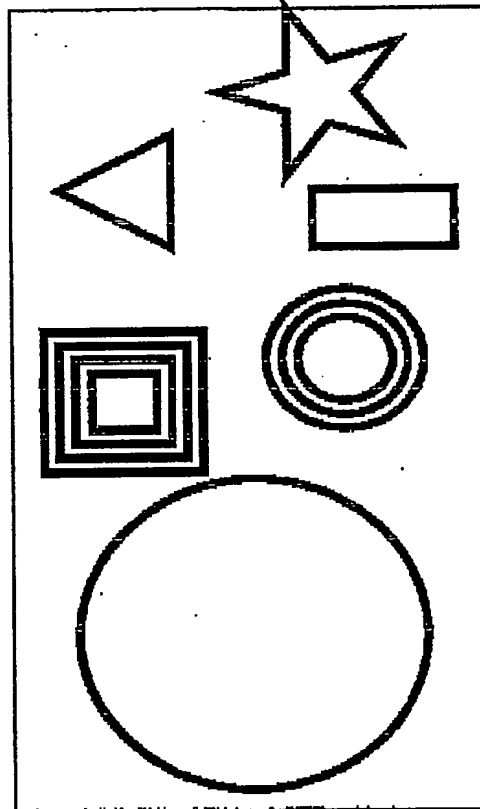


Figure 7d

701

9/14

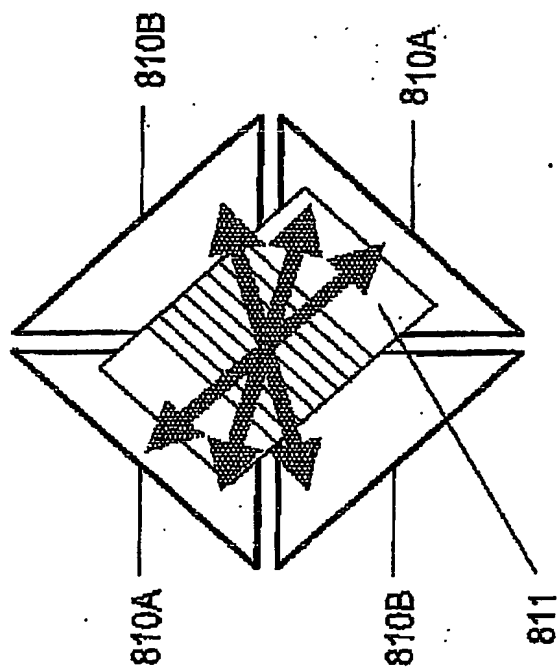


Figure 8b

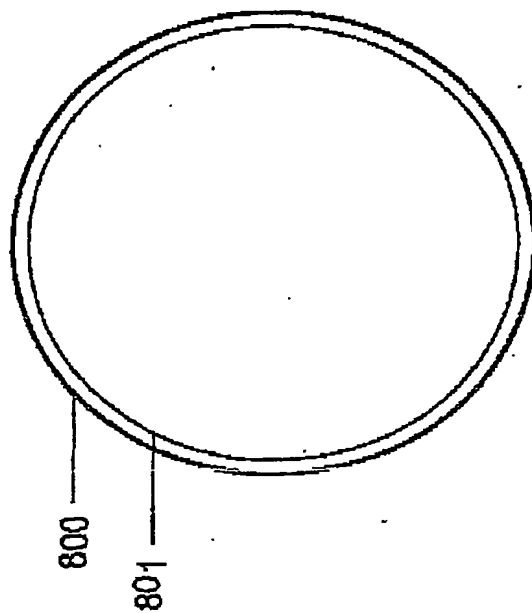


Figure 8a
(Prior Art)

10(14)



Figure 9c



Figure 9f



Figure 9h

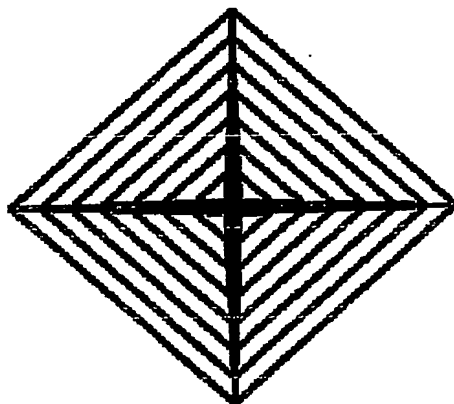


Figure 9j

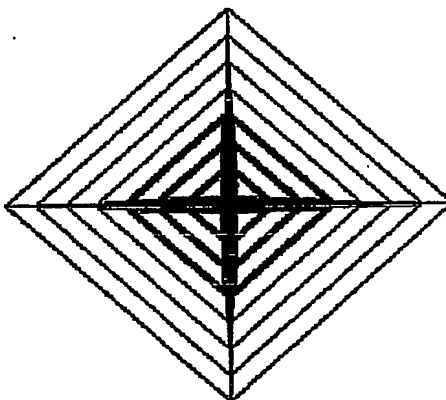


Figure 9l

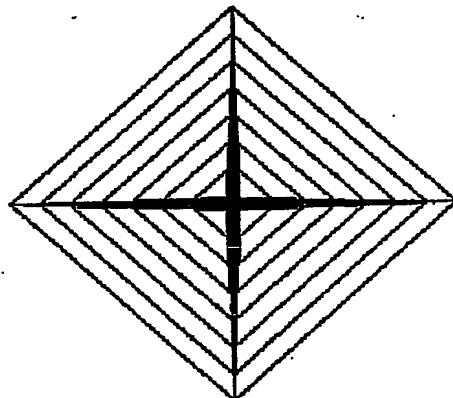


Figure 9n

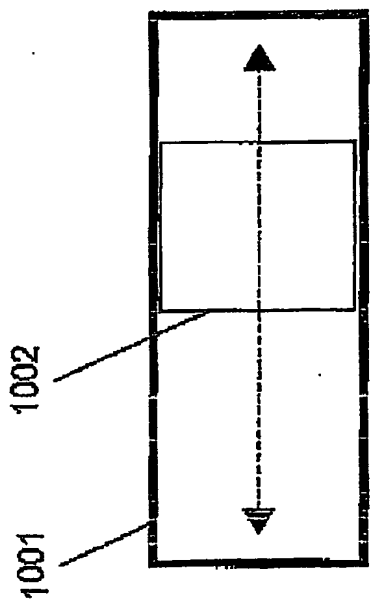


Figure 10a

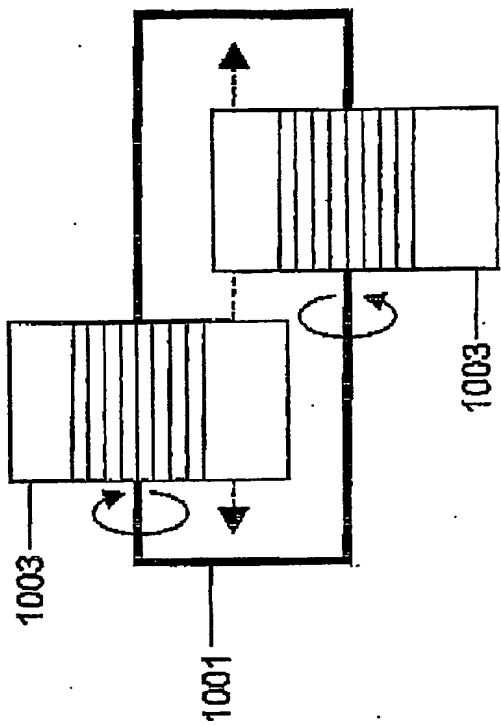


Figure 10b


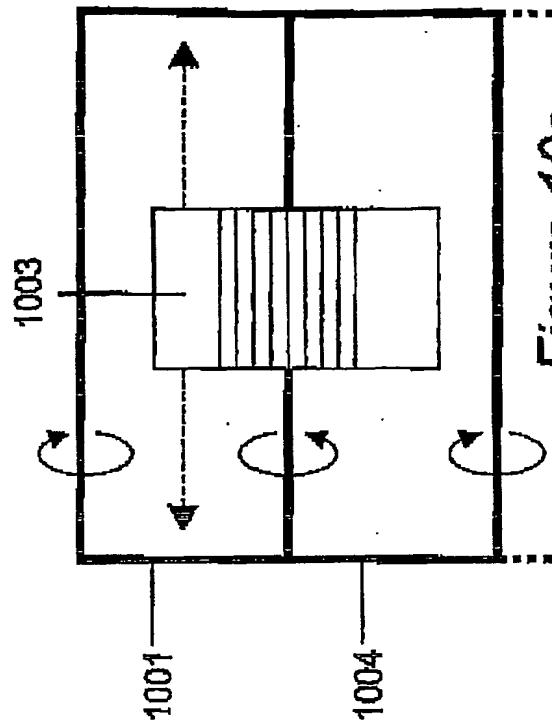


Figure 10c

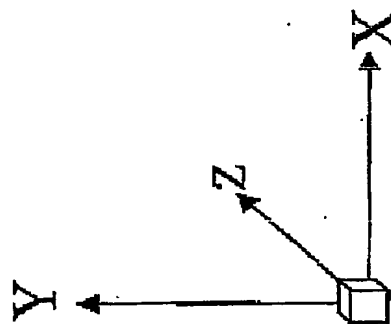

11/14

12/14

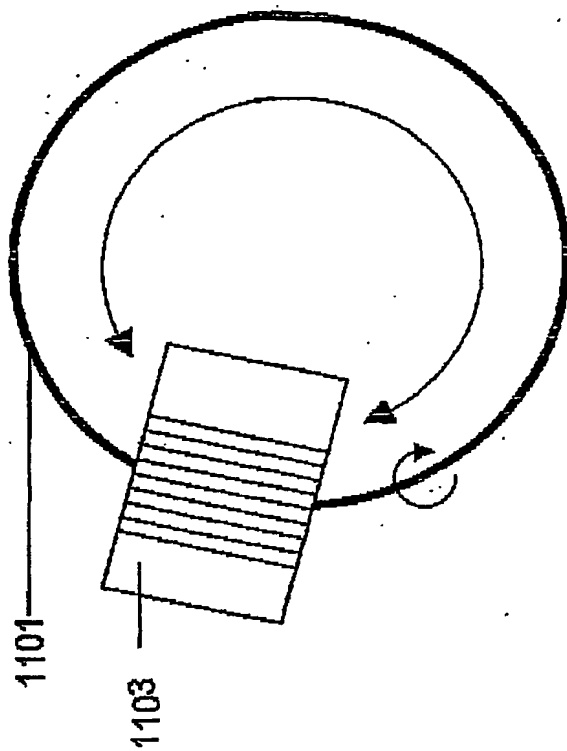


Figure 11b


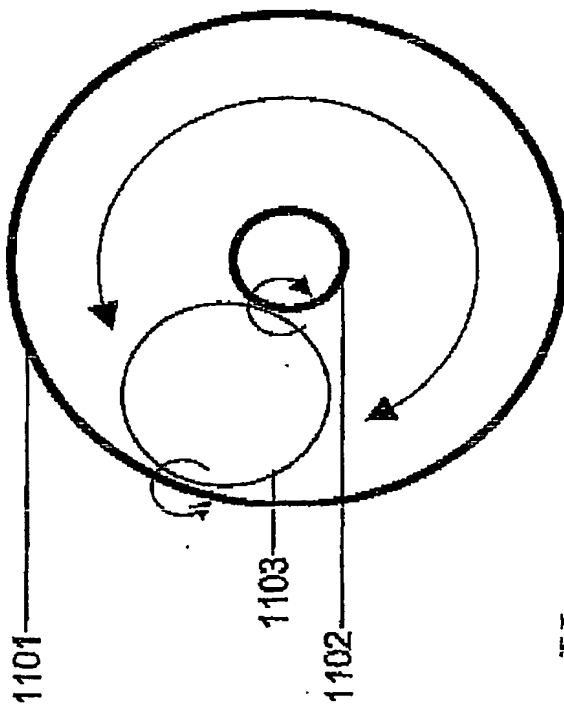


Figure 11a

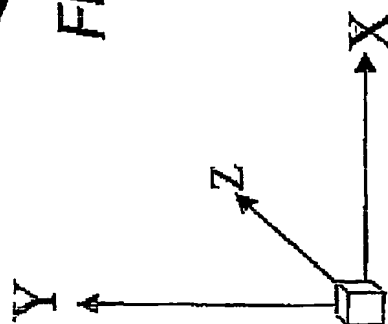

13/14

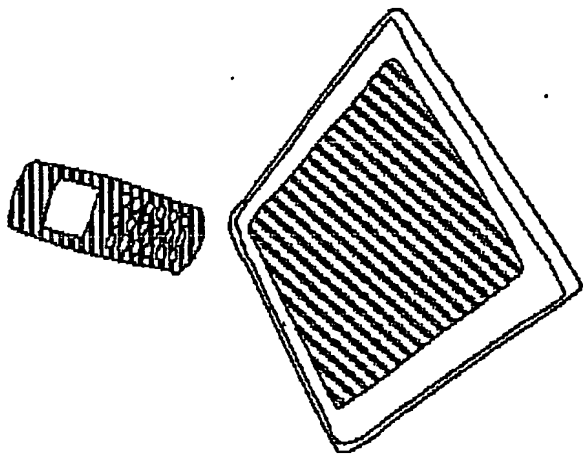


Figure 12c

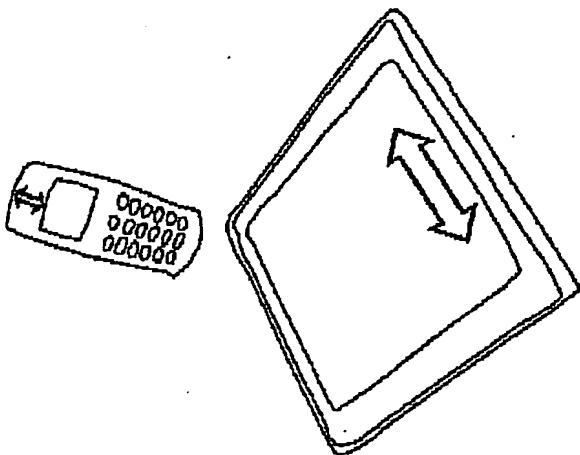


Figure 12b

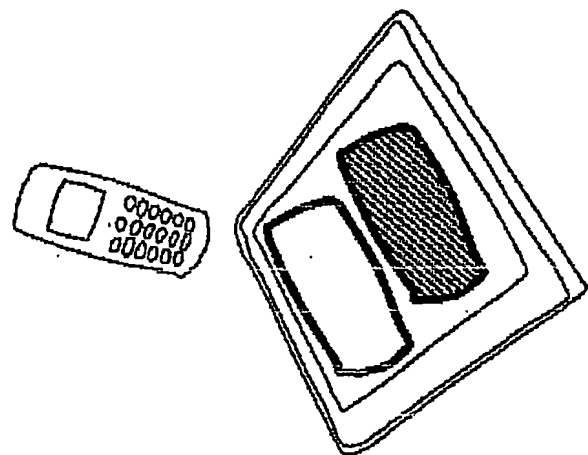


Figure 12a

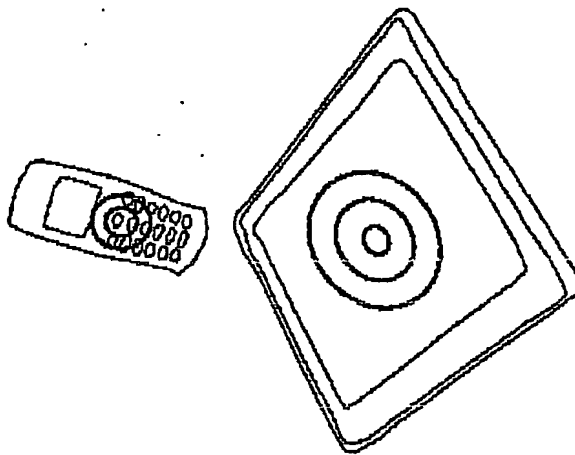


Figure 12d

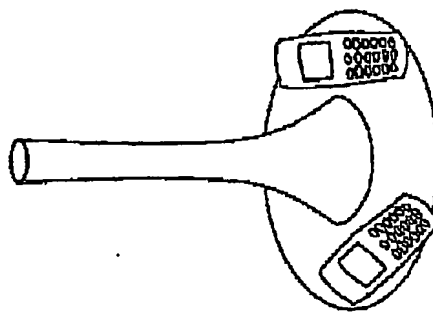


Figure 12e

14/14

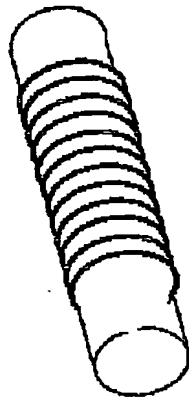


Figure 13a

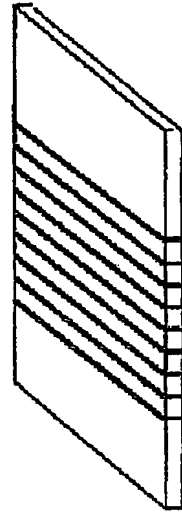


Figure 13b

PCT Application
GB0304654



20